Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

BNC 50 ohm Bulkhead Receptacles

Amphenol®

Fig. 1

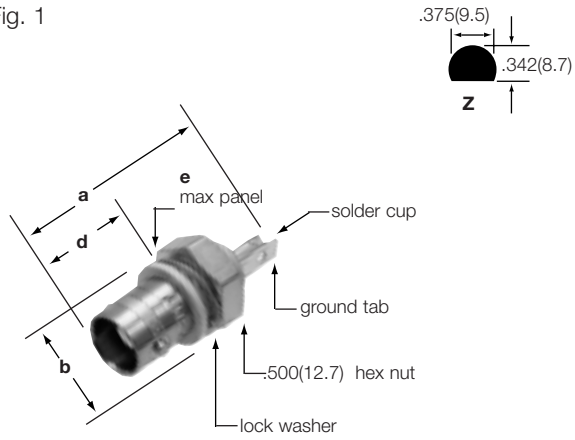

BNC Bulkhead Receptacle Isolated from Panel,
Solder Cup & Ground Tab Front Mount
31-10
31-10-RFX
31-10-RFXG1

Fig. 2

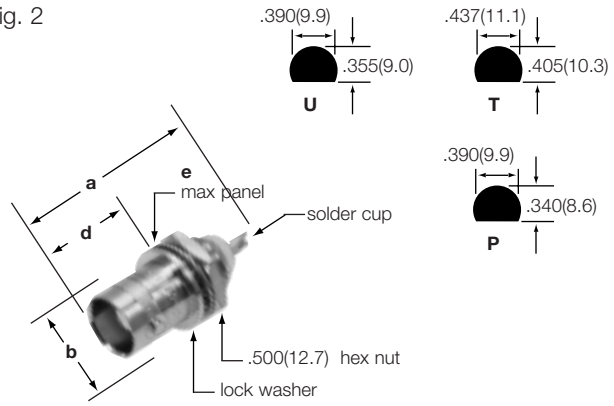

BNC Bulkhead Receptacles
Front Mount

5575	**31-238**
31-102	**31-239**
31-221	**31-2221**
31-221-RFX	**31-3376**
31-236	**31-4238**

Fig. 3

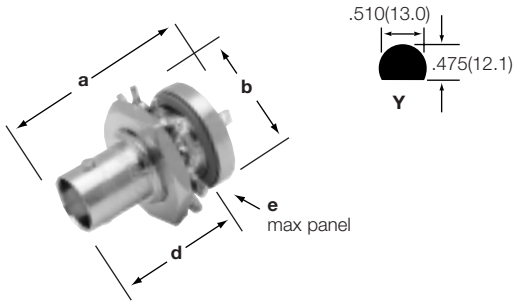

BNC Bulkhead Receptacle
Rear Mount
31-4237

Fig. 4

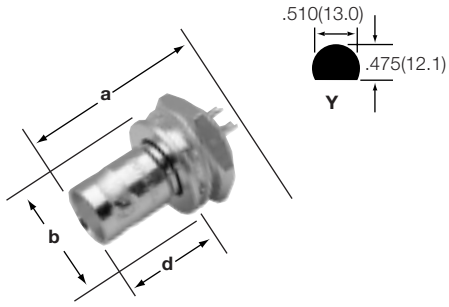

BNC Bulkhead Receptacle
Isolated From Panel
Front Mount
31-4890-1

BNC BULKHEAD RECEPTACLES

Description	Terminal Type	Dimensions, inches (mm) a	b	d	e	Notes Plt.	Ins.	Mtg. Hole	Military Number	Amphenol Number	Fig.	
Front Mount, Isolated from Panel	Solder Cup	1.19(30.2)	.500(12.7)	.471(12.0)	.187(4.8)	P1	D22	Z	—	**31-10***	1	▲
	Solder Cup	1.18(30.0)	.500(12.7)	.471(12.0)	.125(3.2)	P1	D22	Z	—	**31-10-RFX**	1	▲
Front Mount	Solder Cup	1.18(30.0)	.500(12.7)	.471(12.0)	.187(4.8)	P7	D22	Z	—	**31-10-RFXG1**	1	▲
Front Mount	Solder Cup	1.06(27.0)	.500(12.7)	.484(12.3)	.125(3.2)	P1	D1	U	UG-1094/U	**31-221*†**	2	▲
		1.06(27.0)	.500(12.7)	.472(12.0)	.125(3.2)	P7	D23	U	—	**31-221-RFX**	2	▲
		1.06(27.0)	.500(12.7)	.469(11.9)	.156(4.0)	P1	D1	T	UG-625B/U	**31-236***	2	▲
		1.19(30.2)	.500(12.7)	.481(12.3)	.250(6.4)	P1	D1	U	UG-1094A/U	**31-2221**	2	
Front Mount, Gold Plated Contact	Solder Cup	1.19(30.2)	.500(12.7)	.484(12.3)	.250(6.4)	P34	D1	U	M39012/21-0002	**31-3376***	2	
Front Mount, Pressurized	Solder Cup	1.30(32.9)	.578(14.7)	.594(15.1)	.250(6.4)	P1	D9	P	UG-657A/U	**31-239***	2	▲
Front Mount, Pressurized	Solder Cup	1.30(32.9)	.578(14.7)	.594(15.1)	.250(6.4)	P1	D9	P	UG-657/U	**31-102***	2	
Fr. Mount, Gold Plated Contact	Spade	1.20(30.6)	.594(15.1)	.516(13.1)	.250(6.4)	P33	D1	U	M39012/24-0002	**31-4238***	2	
Hermetic External Tooth Lockwasher	Spade	1.20(30.6)	.594(15.1)	.516(13.1)	.250(6.4)	P1	D1/11	U	UG-912/U	**31-238***	2	
Front Mount	Solder Cup	1.06(27.0)	.500(12.7)	.472(12.0)	.156(4.0)	P1	D1	T	UG-625/U	**5575***	2	▲
Rear Mount, Hermetic	Spade	1.34(34.0)	.687(17.4)	.831(21.1)	.250(6.4)	P33	D1/11	Y	M39012/24-0001	**31-4237***	3	
Front Mount Isolated from Panel Metal Mounting Threads	Solder Cup	1.06(27.0)	.625(15.9)	.571(14.5)	.187(4.7)	P4	D1	Y	—	**31-4890-1**	4	

* recognized under the component program of U.L., Inc. ▲ distributor stocked † includes grounding lug